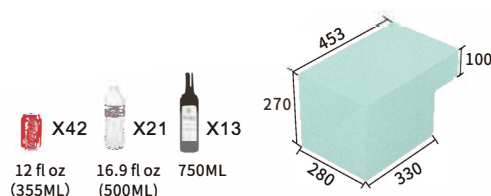
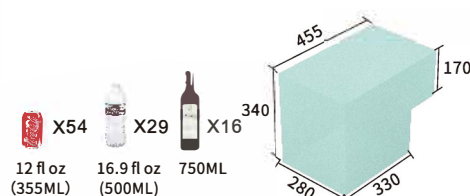
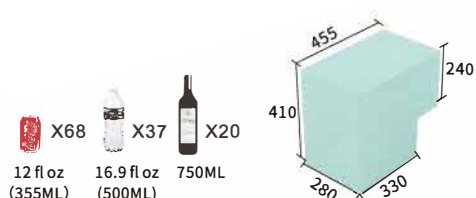
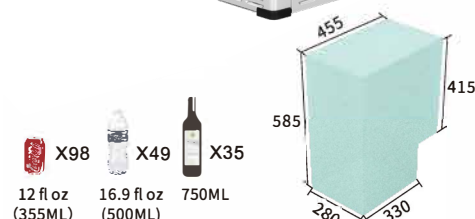


**SECC30**

**SECC40**

**SECC50**

**SECC75**


## Features

- **FREEZES WITHOUT ICE:** -4° F(-20°C) to 68° F(20°C) powerful chilling performance.
- **CAR BATTERY PROTECTION:** With temperature memory function and three stages battery protection system prevents vehicle running out of battery.
- **FEATURES :** Convenient handle, LCD display controlpanel, door latch and ball chain fixture, APP control.
- **High performance:** Name brand compressor offers superior cooling experience.
- **Fit anywhere:** Car/Jeep/Truck/Home/Dorm/Cottage/Garage/RV/Boat/Outdoor (DC/AC).
- **Rugged design:** Shockproof and durable design for handling rocky road. Incline Operation up to 45°off level in short time.
- **Quiet operation:** Less than 45db, like living in quiet suburb.
- **ENERGY SAVING (MAX & ECO MODE):** Two different modes can be adjusted as needed. MAX mode for fast cooling or ECO mode for energy saving.

| MODEL:                             | SECC30                                      | SECC40                                       | SECC50                                      | SECC75                                     |
|------------------------------------|---------------------------------------------|----------------------------------------------|---------------------------------------------|--------------------------------------------|
| TOTAL CAPACITY:                    | 26.7L/28Quarts/0.94Cu. Ft.                  | 35.7L/38Quarts/1.26Cu. Ft.                   | 44.4L/47Quarts/1.57Cu. Ft.                  | 63.8L/67Quarts/2.25Cu. Ft.                 |
| RATED POWER INPUT:                 | 60W                                         | 60W                                          | 60W                                         | 60W                                        |
| POWER SUPPLY:                      | 12/24V DC, 100~240V AC                      | 12/24V DC, 100~240V AC                       | 12/24V DC, 100~240V AC                      | 12/24V DC, 100~240V AC                     |
| RATED CURRENT:                     | DC 5.0A/2.5A<br>AC 1.2A-0.5A                | DC 5.0A/2.5A<br>AC 1.2A-0.5A                 | DC 6.0A/3.0A<br>AC 1.5A-0.7A                | DC 6.0A/3.0A<br>AC 1.5A-0.7A               |
| FRIDGE DIMENSION (L X W X H INCH): | 652*369*357mm<br>25 3/4*14 9/16*14 1/16inch | 652*369*427mm<br>25 3/4*14 9/16*16 13/16inch | 652*369*497mm<br>25 3/4*14 9/16*19 9/16inch | 652*369*673mm<br>25 3/4*14 9/16*26 1/2inch |
| PACKING SIZE (L X W X H INCH):     | 665*440*410mm<br>26 3/16*17 5/16*16 1/8     | 665*440*480mm<br>26 3/16*17 5/16*18 15/16    | 665*440*550mm<br>26 3/16*17 5/16*21 5/8     | 665*440*725mm<br>26 3/16*17 5/16*28 9/16   |
| NET WEIGHT:                        | 12.9kg/28.4lbs                              | 13.7kg/30.2lbs                               | 14.4kg/31.7                                 | 17.9kg/39.5lbs                             |
| GROSS WEIGHT:                      | 14.6kg/32.2lbs                              | 15.4kg/34.0lbs                               | 16.3kg/35.9lbs                              | 19.8kg/43.7lbs                             |
| FRIDGE/FREEZER (COMBINATION):      | -20~20°C (-4~68°F)                          | -20~20°C (-4~68°F)                           | -20~20°C (-4~68°F)                          | -20~20°C (-4~68°F)                         |
| FCL QUANTITY:                      | 215/440/528<br>(20/40/40'HQ)                | 164/340/425<br>(20/40/40'HQ)                 | 172/352/352 (20/40/40' HQ)                  | 129/264/264<br>(20/40/40'HQ)               |
| NOISE LEVEL:                       | <45dB                                       | <45dB                                        | <45dB                                       | <45dB                                      |

\*Due to product improvement, the technical information might be different from actual information, please refer to the rating label on the product. (Note: ±3°C temperature difference is permitted)



Control panel



Handle



Cup holders




Pull chain fixture



Power bank(Optional)



Interior chamber

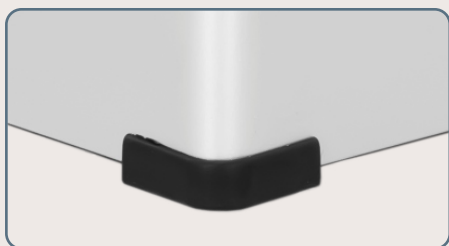

Foot pad



AC/DC dual use



Door latch