







SECUD45



SECUD55



SECUD65

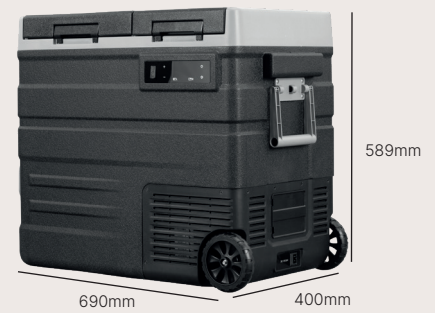

Features

- Fridge/Freezer combo: dual compartments with separate door and individual temperature control, -20°C (-4°F) to 20°C (69°F) powerful chilling performance.
- Reversible door make door opening more flexible.
- With temperature memory function & three-stage battery protection system to prevent the vehicle from running out of battery.
- Specific parts: LED control panel, door latch, drain plug, LED light, USB port, detachable battery (optional), heavy duty pull rod, durable wheels.
- Fit Anywhere: Car /Jeep /Truck /Home /Dorm /Cottage /Garage /RV /Boat /Outdoor (DC/AC).
- Rugged design: Shockproof and durable design for handling rocky road. Incline Operation up to 45° angle in short time.
- Quiet operation: less than 45db, just like living in a quiet suburb.
- Adjustable Running Mode: Two different modes can be adjust-ed as needed. (Fast cooling/ Energy saving)

MODEL:	SECUD45	SECUD55	SECUD65
TOTAL CAPACITY:	40.5L/42Quarts/1.43Cu.Ft	49.1L/52Quarts/1.73Cu.Ft.	56.7L/60Quarts/2.0Cu.Ft.
COMPARTMENT 1 (FRIDGE/FREEZER):	30.7L/32Quarts /1.08Cu.Ft	35.7L/38Quarts /1.26Cu.Ft	16.7L/18Quarts /0.59Cu.Ft
COMPARTMENT 2 (FRIDGE/FREEZER):	9.8L/10Quarts /0.35Cu.Ft	13.4L/14Quarts /0.47Cu.Ft	16.7L/18Quarts /0.59Cu.Ft
POWER SUPPLY:	12/24V DC,100-240V AC	12/24V DC,100-240V AC	12/24V DC,100-240V AC
RATED CURRENT:	AC 1.2A-0.5A DC 5.0A/2.5A	AC 1.2A-0.5A DC 5.0A/2.5A	AC 1.2A-0.5A DC 5.0A/2.5A
FRIDGE DIMENSION (W X D X H):	690*400*469mm 27 3/16 *15 3/4 *18 1/16inch	690*400*529mm 27 3/16 *15 3/4 *20 13/16inch	690*400*589mm 27 3/16 *15 3/4 *23 3/16inch
PACKING SIZE (W X D X H):	750*470*530mm 29 9/16*18 1/2*20 11/16inch	750*470*590mm 29 9/16*18 1/2*23 1/4inch	750*470*650mm 29 9/16*18 1/2*25 5/8inch
NET WEIGHT:	18kg/39.7lbs	19kg/41.9lbs	20.5kg/45.2lbs
GROSS WEIGHT:	20.5kg/45.2lbs	21.5kg/47.4lbs	23kg/50.7lbs
FRIDGE/FREEZER (COMBINATION):	-20~20°C (-4~68°F)	-20~20°C (-4~68°F)	-20~20°C (-4~68°F)
FCL QUANTITY:	144/300/300(20' /40' 40'HQ)	108/225/300(20' /40' 40'HQ)	108/225/225(20' /40' 40'HQ)
RATED POWER INPUT:	60W	60W	60W
NOISE LEVEL:	<45dB	<45dB	<45dB


*Due to product improvement, the technical information might be different from actual information, please refer to the rating label on the product. (Note:±3°C temperature difference is permitted)



Interior LED light



Digital display

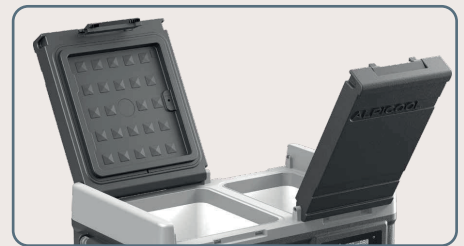

Reversible door




Detachable battery (optional)
(only for UD45/55/65E)



Door latch



DC/AC/Solar (optional)
(optional solar only for UD45/55/65E)

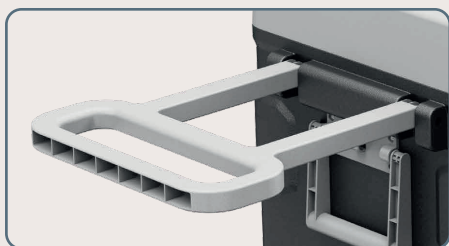

Heavy duty pull rod



Durable wheels



Interior chamber